



Mounting instruction Spring doorguard Type KSH 940K ZE

Tools

Screwdriver

This set consist of:

- Spring doorguard
- Bended hook
- Flat hook
- 6x woodscrews


Application

1. Suitable for inswinging and outswinging doors
2. Impossible to open the window or door from outside
3. Spring doorguard can easily be unlocked from inside when door or window is closed.

Mounting

- A. For inswinging windows and doors:
Mount the spring doorguard on the frame and the bended hook on the closed window or door with a space within between 0,75—1 cm.
- B. For outswinging windows and doors:
Mount the flat hook on the frame and the spring doorguard on the closed window or door with a space within between 0,75—1 cm.

Situation A - bended hook

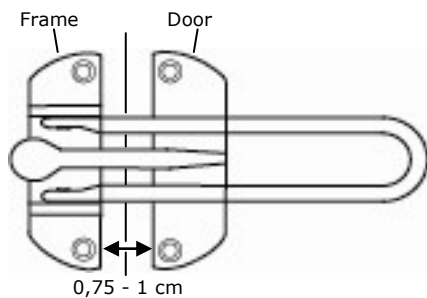

Situation B - flat hook

