



KEYA[®]

UNLOCK INNOVATION

KEYA KONNECT



Index

1.	KEYA KONNECT APP	3
1.1	Description KEYA KONNECT APP.....	4
1.2	Language.....	¡Error! Marcador no definido.
1.3	About this App	5
1.4	Dark mode.....	¡Error! Marcador no definido.
2.	Cards in Apps	¡Error! Marcador no definido.
3.	First steps	¡Error! Marcador no definido.
3.1	Add Management to KEYA KONNECT APP.....	8
3.2	Add Master to KEYA KONNECT APP.....	9
4.	MULTIUSER Mode	10
5.	SINGLE USER mode.....	10
6.	Open and close USER	11
6.1	MULTIUSER Version	11
6.2	SINGLE USER Version.....	12
7.	Management.....	¡Error! Marcador no definido.
7.1	Assigned Master	14
7.2	Management configuration.....	15
7.3	Openings	¡Error! Marcador no definido.
7.4	Clock set.....	17
7.5	Lock status.....	17
7.6	Remove management.....	18
8.	Master	¡Error! Marcador no definido.
8.1	Single user assign	20
8.2	Assigned users.....	21
8.3	Register	¡Error! Marcador no definido.
8.4	Inspection.....	¡Error! Marcador no definido.
8.5	Remove users	24
8.6	Master configuration	¡Error! Marcador no definido.
8.7	Read configuration	26
8.8	Remove master	27
9.	Battery change.....	¡Error! Marcador no definido.

1. KEYA KONNECT APP




1.1 Description KEYA KONNECT APP




	Side menu button	Press to open the side menu with the Language, Add MANAGEMENT and About App options
	Card in en App	Press to open the Cards in App already added. It can be the cards in App: Free, Single user, Multi-user, MASTER and MANAGEMENT
	Add Card button in App	Press to add new Cards in the App

1.2 Language

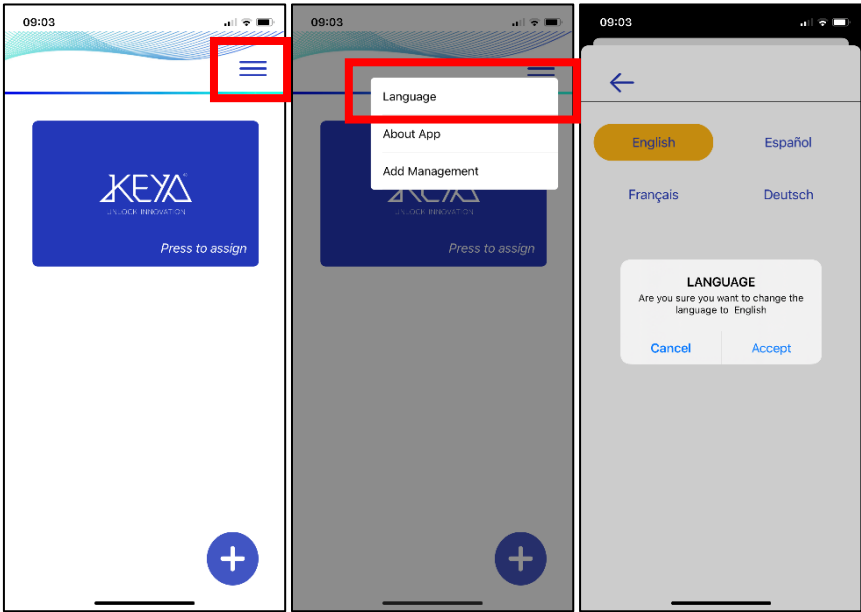


1. Press the Side menu button.
2. Select the language and press OK in the pop-up.
3. Some messages may be affected by the language of the Operating System. It is recommended to restart the App after changing the language.

1.3 About this App

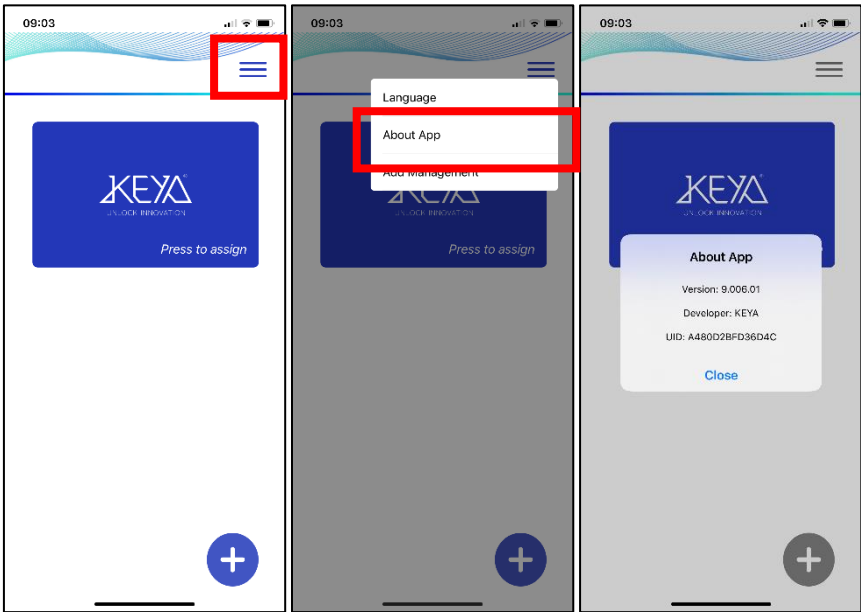

1. Press the Side menu button.
2. Click on About App.
3. Shows the App information and the UID of the Smartphone..

1.4 Dark mode

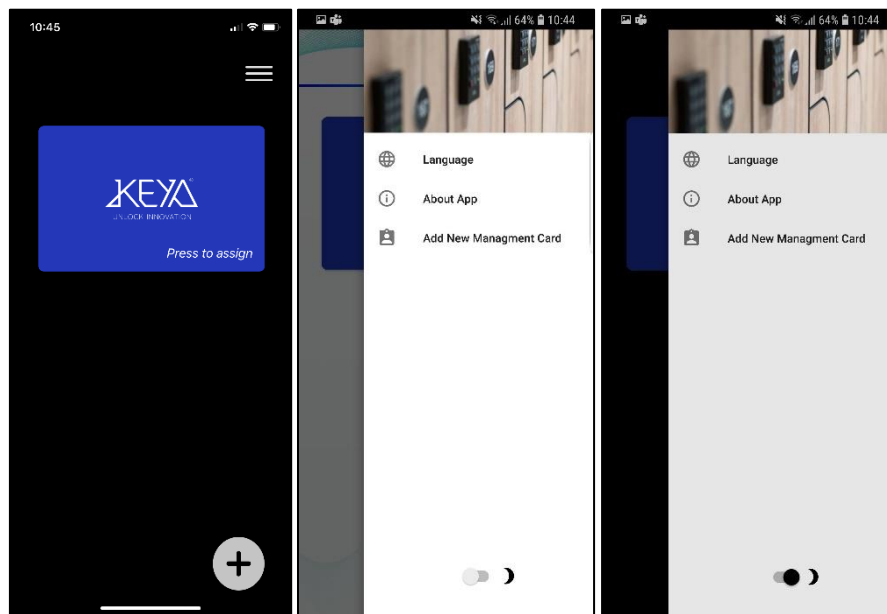

- In iOS system Dark mode will appear according to the preferences of the operating system.
- In Android system:
 1. Press Side menu button.
 2. Select between light mode or dark mode.

2. Cads in Apps



MANAGEMENT

The MANAGEMENT card in App is at the top of the card hierarchy in Apps.

Allows you to manage the MASTER cards in the App also the KEYA KONNECT configuration.

- Functions: Assign / Unassign MASTERS
Check assigned MASTERS
- Set Up: Mode, Led ON and acoustic volume
Inspection time and single user closure
Time zone and waiting tags
- Check: IDOF, Number and Firmware



MASTER

Up to 5 MASTER per facility.
MASTER Cards in Apps are found under MANAGEMENT in the hierarchy.

They allow you to manage the USER cards in the Apps and the basic configuration of KEYA KONNECT.

- Functions: Assign USERS
Inspection process
Consult assigned Tags
Delete and release USERS
- Set Up: Mode, Led ON and acoustic volume
- Check: Register




USER

USER Cards in Apps are used to interact with KEYA KONNECT.
In single user mode, maximum 50 USERS per KEYA KONNECT
In Multi-user mode maximum 1 USER per KEYA KONNECT and installation

- Functions: Open / Close with card in App.


3. First steps

3.1 Add MANAGEMENT to KEYA KONNECT APP

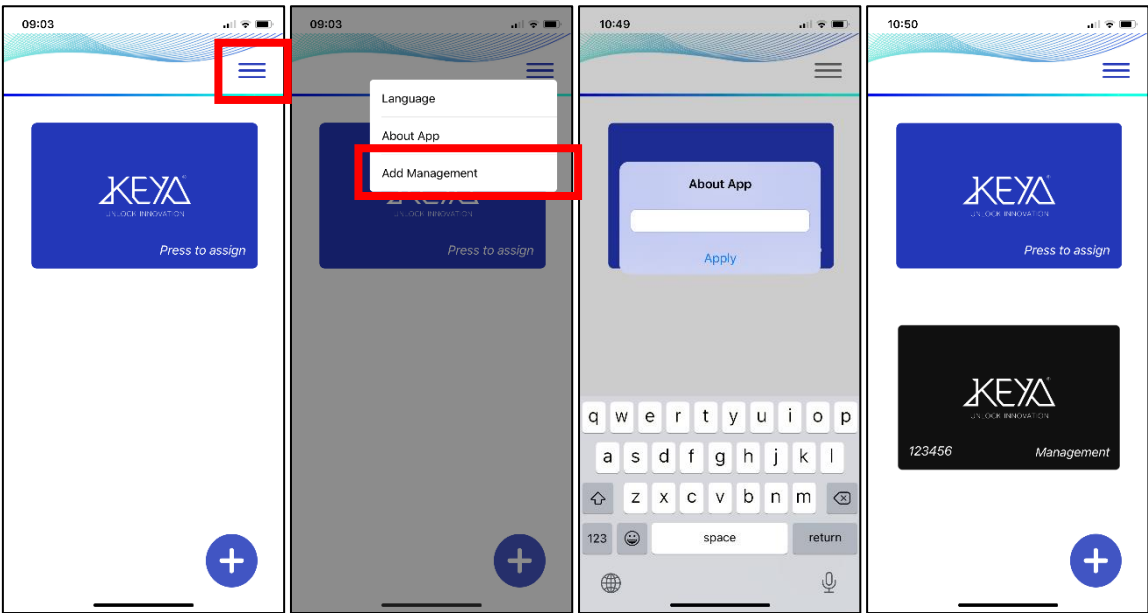

1. Press the side menu button.
2. Click on Add MANAGEMENT.
3. Add the alphanumeric code provided by KEYA.
4. MANAGEMENT will appear on the main panel.

3.2 Add MASTER to KEYA KONNECT APP

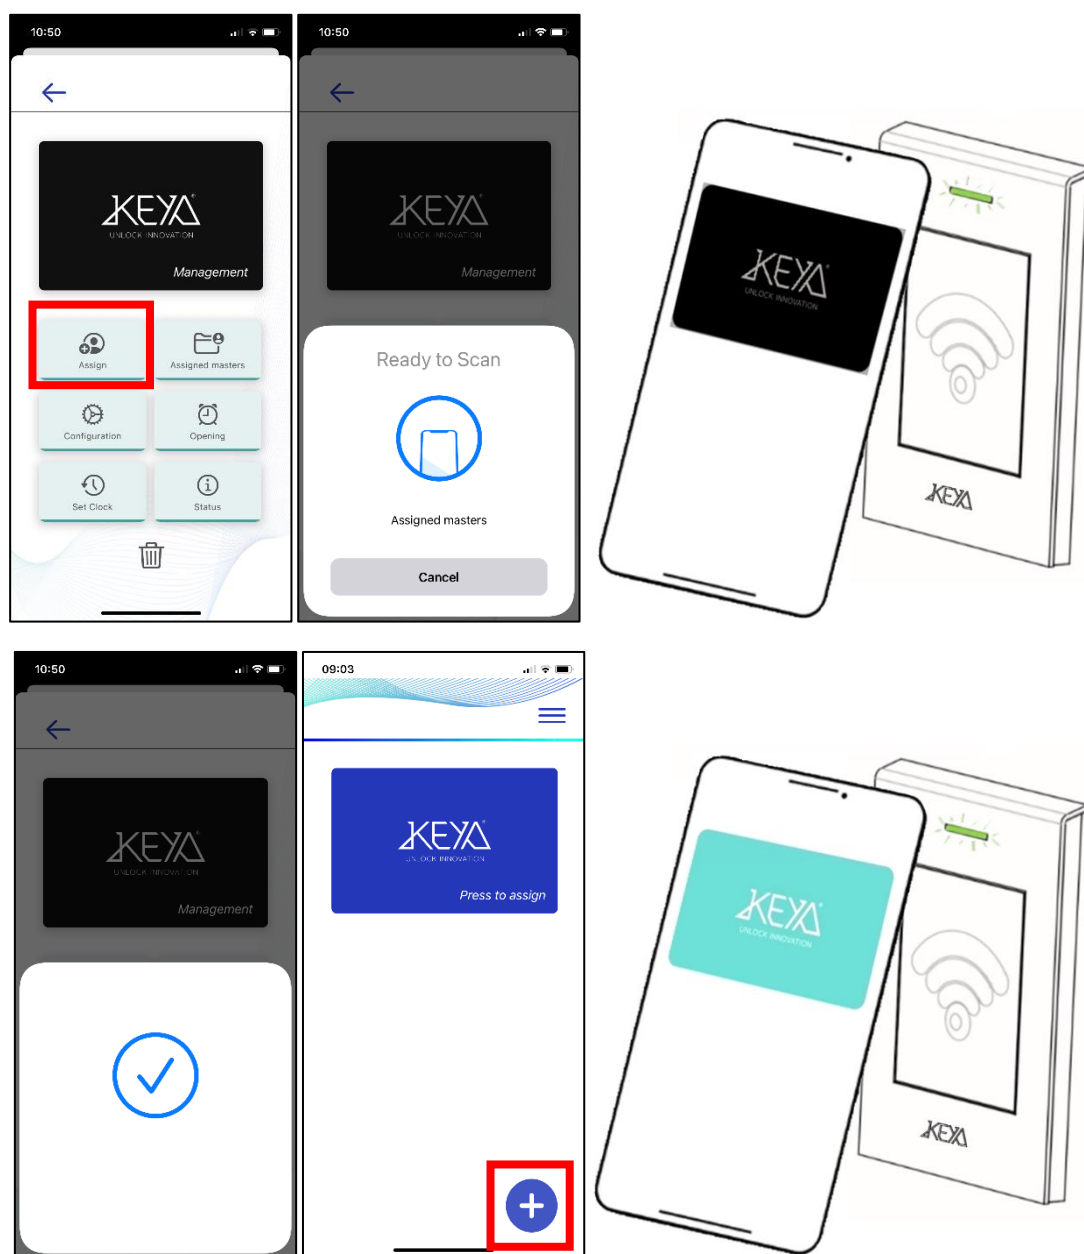

1. In the MANAGEMENT in App, press the Assign Button.
2. Approach the Smartphone to the KEYA KONNECT.
3. KEYA KONNECT will sound confirmation and the Green led will light.
4. Confirmation will appear on the smartphone.
5. Press Add Card button on the new smartphone *.
6. Approach the new smartphone closer to KEYA KONNECT during the blue flashing.
7. Confirmation will sound and the Green Led on KEYA KONNECT will light.
8. The MASTER card will appear in App on the main panel.
9. Do the same process on all KEYA KONNECT.

* This process can be done on a new smartphone or on the same one that contains MANAGEMENT.

4. MULTIUSER Mode

MULTIUSER mode is designed for installations where KEYA KONNECT will be free for public use.

KEYA KONNECT can be Open and free or Closed and in use:

1. Open and free: No prior assignment is required and when swiping a card in the multi-user App, KEYA KONNECT will be closed.
2. Closed and in use: It will only accept the card in the User App already linked. To open, swipe the same card in the Multi-user App.

5. SINGLE USER mode

SINGLE USER mode is designed for installations where KEYA KONNECT will be restricted to a limited number of users. Remaining closed at all times.

The cards in the Single user mode App require a previous assignment with a MASTER card in the App in order to open KEYA KONNECT. maximum number of users per KEYA KONNECT is 50 Subscribed Users.

In SINGLE USER mode, the user cards in Apps open KEYA KONNECT, after two seconds KEYA KONNECT will close automatically.

If no card has been assigned in Single user mode KEYA KONNECT will remain open.

6. Open and close USER

6.1 MULTIUSER Version



Close

1. Press on the card in the USER App
2. Approach the smartphone to KEYA KONNECT.
3. Confirmation will sound, the Green Led will light up and close.
4. The information on the card will be updated in the USER App with IDOF and number.

Open

1. Click on the card in the USER App.
2. Approach the smartphone to KEYA KONNECT.
3. Confirmation will sound, Green Led will light up and lock will open.
4. The information on the card will be updated in the USER App with IDOF and number.

** In case of an Error, three short beeps will sound and the Red Led will blink three times.

*** The sound indications described are not fulfilled for KEYA KONNECT Silent mode configuration.

6.2 SINGLE USER version



Open


1. Click on the SINGLE USER card in the App ⁽¹⁾.
2. Approach the smartphone to KEYA KONNECT.
3. Confirmation will sound, Green Led will light up and lock will open
4. After two seconds KEYA KONNECT will close automatically.

⁽¹⁾ Follow the procedure in section 8.1 to assign SINGLE USER cards in the App

** In case of an Error, three short beeps will sound and the Red Led will blink three times.


*** The sound indications described are not fulfilled for KEYA KONNECT Silent mode configuration.

7. MANAGEMENT

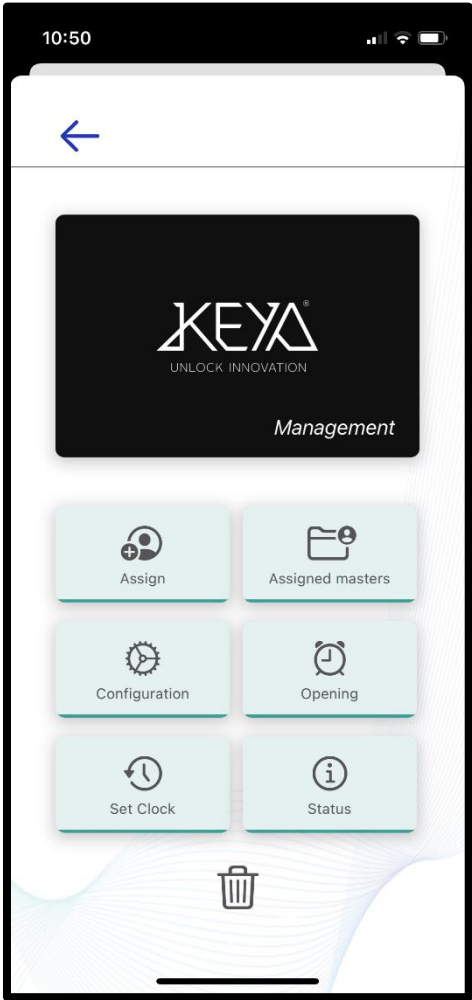

 Assign	Assign	Assignment Process for MASTERS
 Assigned masters	Assigned Master	Check assigned MASTERS
 Configuration	Configuration	Viewing the KEYA KONNECT settings
 Opening	Opening	Visualization of Automatic openings
 Set Clock	Clock set	Press to synchronize the time of the smartphone and KEYA KONNECT
 Status	Status	Contains KEYA KONNECT battery level and performed operations
	Trash	Delete the MANAGEMENT card from the Smartphone


7.1 Assigned MASTERS

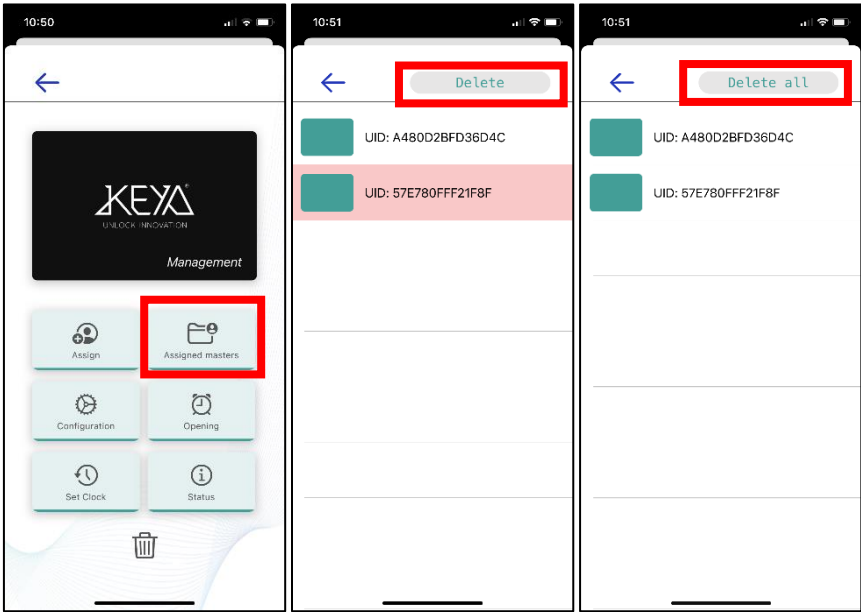

- 1. Press the assigned MASTERS Button.
- 2. Approach the Smartphone to KEYA KONNECT.
- 3. A list of MASTER will appear.
- 4. Select the MASTER you want and press Delete or Delete All.
- 5. Approach the Smartphone to KEYA KONNECT.

MASTER UID	Identification number of MASTER cards
------------	---------------------------------------


7.2 MANAGEMENT configuration

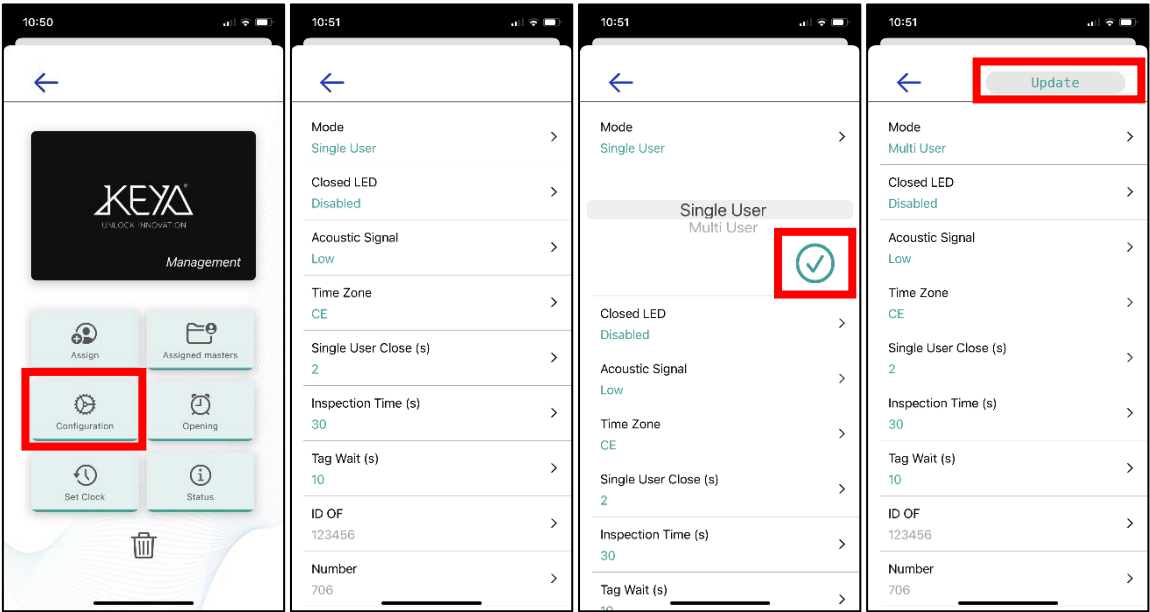

- 1. Press the Settings Button.
- 2. Approach the Smartphone to KEYA KONNECT.
- 3. The configuration list will appear.
- 4. Select the parameter you want to change.
- 5. Once the parameter change has been made, press the confirmation button.
- 6. Once all the desired changes have been made, click Update.
- 7. Approach the Smartphone to KEYA KONNECT.

Mode	Single user / Multi user
Volume	Silence / Low / High
LED when close	Disabled / Enabled
Time zone	No zone / CE / EE. UU. / Australia / New Zealand
Single user Closure	Time it takes for KEYA KONNECT to automatically close in single user mode
Inspection Time	Time it takes for KEYA KONNECT to stay open during the inspection process
Waiting tags	New card reception waiting time
IDOF	Production order identification number. Cannot be modified
Number	Locker number. Cannot be modified


7.3 Openings

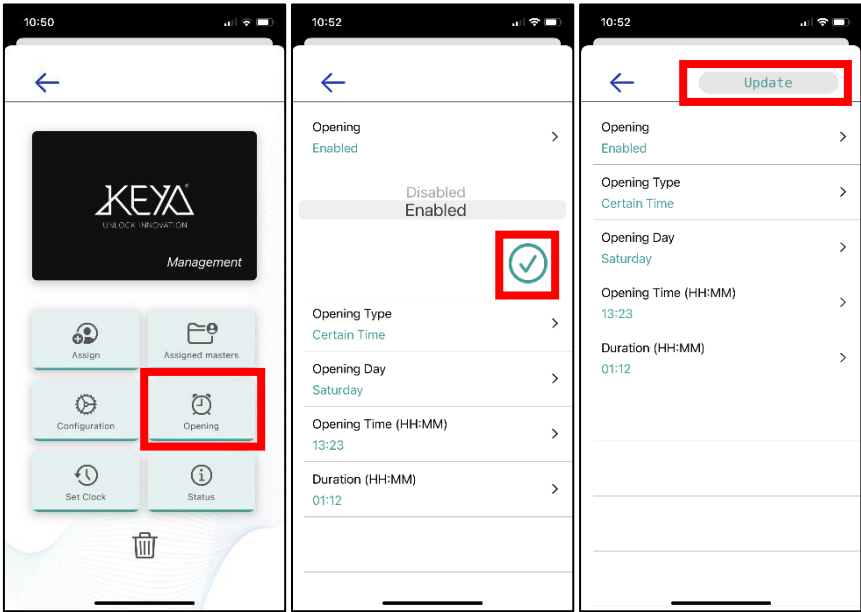

- 1. Press the Opening Button.
- 2. Approach the Smartphone to KEYA KONNECT.
- 3. Opening configuration list will appear.
- 4. Once the parameter change has been made, press the confirmation button.
- 5. Once all the desired changes have been made, click Update.
- 6. Approach the Smartphone to KEYA KONNECT.


Opening	Disabled / Enabled
Opening Type	Specific Time / After certain use
Opening Day	Monday / Tuesday / Wednesday / Thursday / Friday / Saturday / Sunday / Everyday / Only Business Days
Opening Time (HH: MM)	Specific time that you want the Opening take place.
Duration (HH:MM)	Duration of automatic opening. If "0 hours" and "0 minutes" are specified, the lock will remain open.

7.4 Clock set

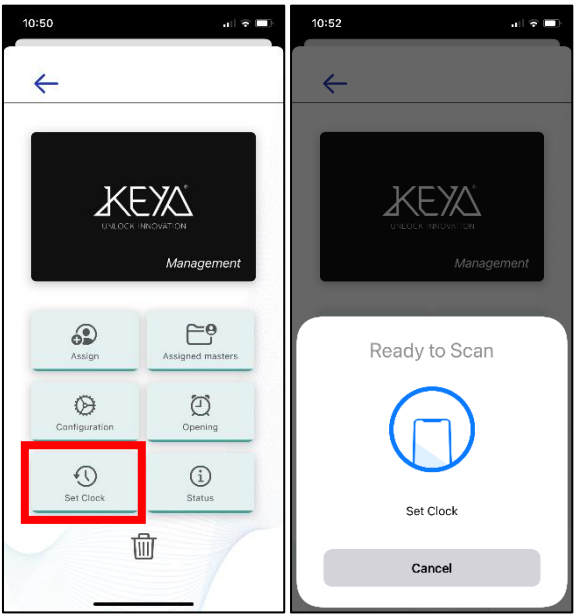


1. Press Set Clock button.
2. Approach the Smartphone to KEYA KONNECT.
3. La hora de KEYA KONNECT se habrá actualizado con la hora del Smartphone.

7.5 Estado

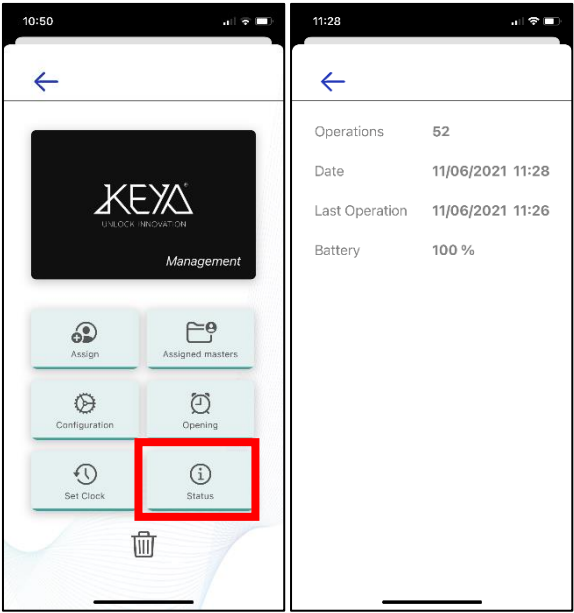


1. Pulsar el Botón Estado.
2. Approach the Smartphone to KEYA KONNECT.
3. Aparecerá el listado de Estado del KEYA KONNECT seleccionado.

7.6 Remove MANAGEMENT

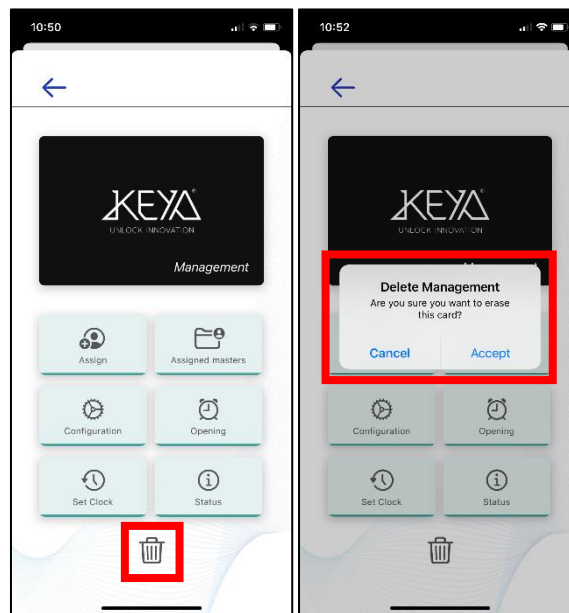

1. Press trash button.
2. A warning pop-up will appear.
3. If you press accept the card will disappear from the App.

8. MASTER

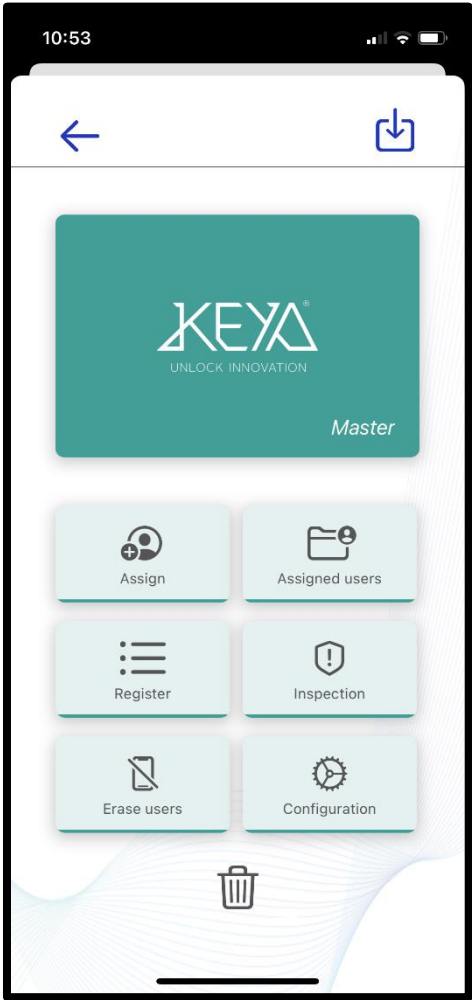

	Assign	Process for Assignment and Unassignment of USERS
	Assigned users	Check Assigned USERS
	Register	Check the KEYA KONNECT settings
	Inspection	Inspection process, without deleting USERS
	Delete users	Delete the USERS in the App
	Configuration	Set Mode, Led closed and volume.
	Trash	Remove the MASTER card from the Smartphone
	Read Configuration	Allows consulting the KEYA KONNECT configuration


8.1 Single user assign



1. In the MASTER in App, press the Assign / Unassign Button.
2. Approach the Smartphone to KEYA KONNECT.
3. KEYA KONNECT will sound and the Green led will light.
4. Confirmation will appear on the smartphone.
5. Press Add Card button on the new smartphone *.
6. Approach the new smartphone to KEYA KONNECT during the Blue flashing.
7. Confirmation will sound and the Green Led on KEYA KONNECT will light.
8. The USER card will appear in the App.

* This process can be done on a new smartphone or on the same one that contains MASTER.


8.2 Assigned USERS

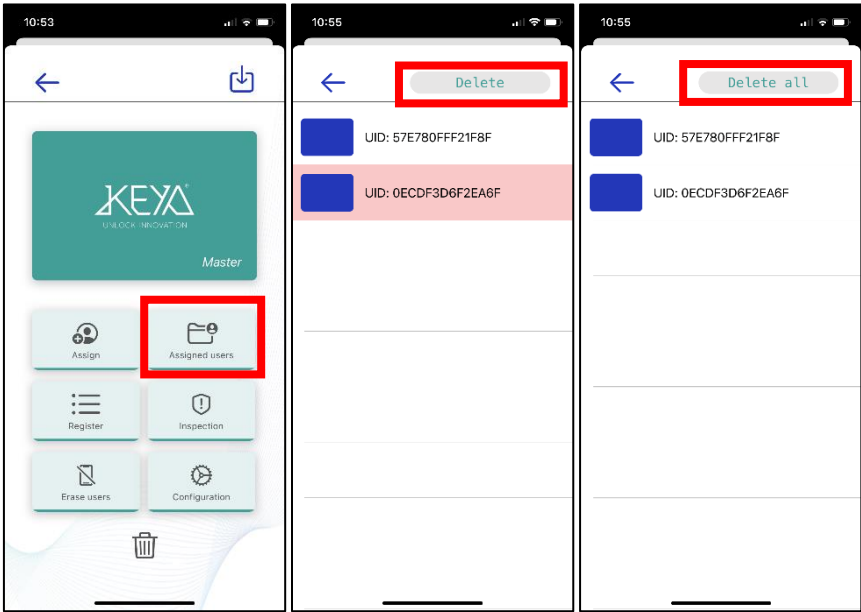

- 1. Press the Assigned USERS Button.
- 2. Approach the Smartphone to KEYA KONNECT.
- 3. The list of assigned USERS will appear.
- 4. Select the USER you want and press Delete or Delete All
In case of pressing "delete all" the lock will open
- 5. Approach the Smartphone to KEYA KONNECT.

USER UID	Identification number of USER cards
----------	-------------------------------------


8.3 Register

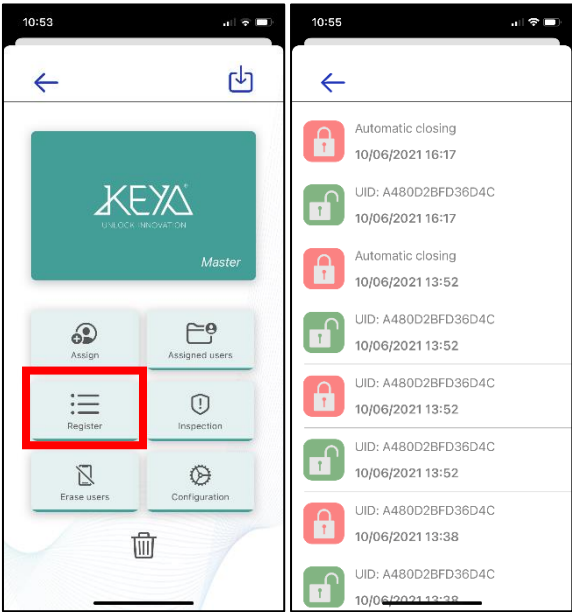

- 1. Press the Register Button.
- 2. Approach the Smartphone to KEYA KONNECT.
- 3. KEYA KONNECT Movement record list will appear.

Date and Time	Time of the action taken
Action	Opening or closing symbol
Card Type	MANAGEMENT / MASTER / USER / Opening by PC / APP that has did the opening or closing action
UID	Identification number
Mode	Mode in which the opening or closing action was performed

8.4 Inspection

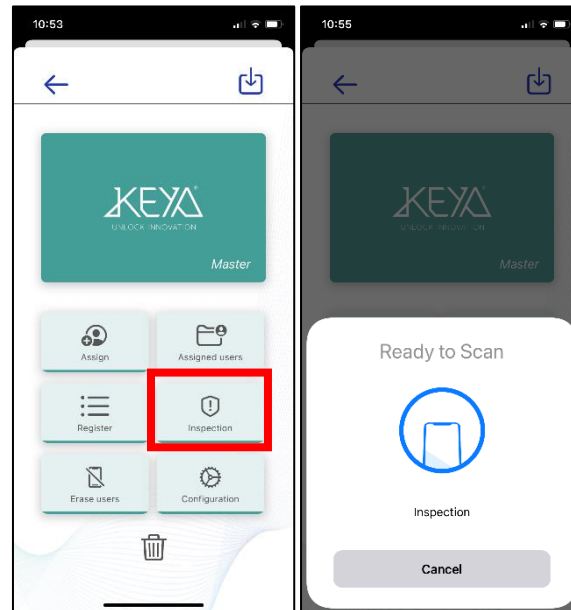

1. Press the Inspection Button.
2. Approach the Smartphone to KEYA KONNECT.
3. KEYA KONNECT will carry out the inspection process.

8.5 Remove USERS

10:53

←

↓

KEYA

UNLOCK INNOVATION

Master

Assign

Assigned users

Backdoor

Inspection

Erase users

Configuration

🗑️

10:56

←

↓

KEYA

UNLOCK INNOVATION

Master

Ready to Scan

Erase users

Cancel

10:53

←

↓

KEYA

UNLOCK INNOVATION

Master

✓

10:58

☰

KEYA

UNLOCK INNOVATION

123456 Multi User (N°706)

+

KEYA

UNLOCK INNOVATION

KEYA

UNLOCK INNOVATION

KEYA

UNLOCK INNOVATION

KEYA


UNLOCK INNOVATION

1. In the MASTER App, press the Delete USERS Button.
2. Approach the Smartphone to KEYA KONNECT.
3. KEYA KONNECT will sound and the Green led will light.
4. Confirmation will appear on the smartphone.
5. Click on the USER virtual card to delete the new smartphone *.
6. Bring the new smartphone to KEYA KONNECT during the Blue flashing.
7. Confirmation will sound and the Green Led on KEYA KONNECT will light.
8. The USER card will be deleted.

www.keya.es

24


8.6 MASTER configuration

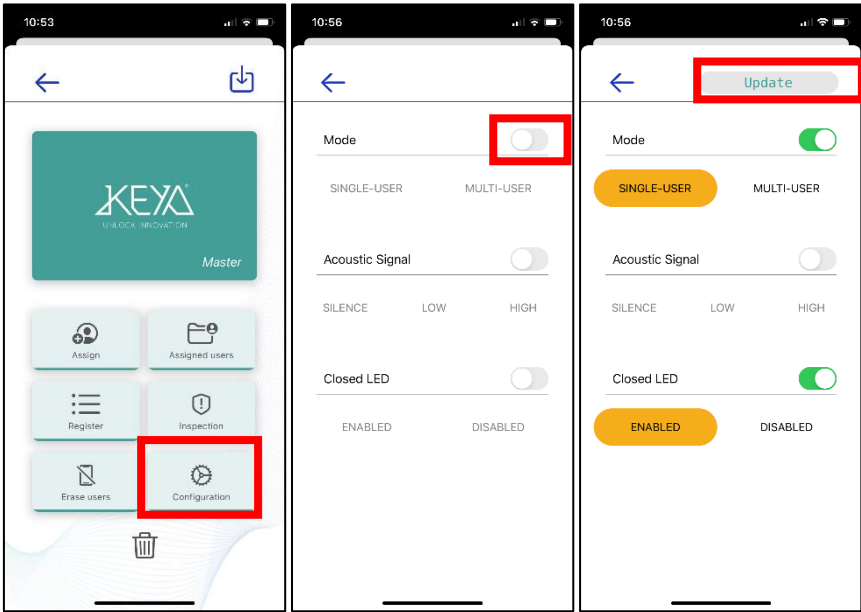

- 1. Press the Settings Button.
- 2. Approach the Smartphone to KEYA KONNECT.
- 3. The Configuration list will appear.
- 4. Activate the selector of the setting to be changed.
- 5. Once all the desired changes have been made, click Update button.
- 6. Approach the Smartphone to KEYA KONNECT.

Mode	Single user / Multi user
Volume	Silence / Low / High
LED when close	Disabled / Enabled


8.7 Read Configuration

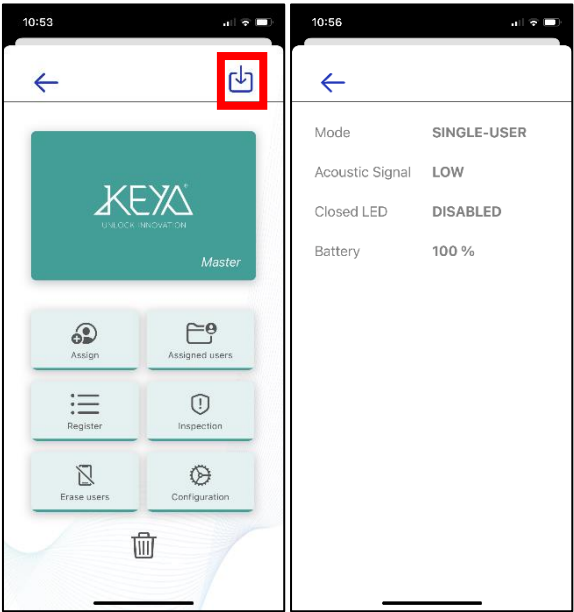

- 1. Press the Read Configuration.
- 2. Approach the Smartphone to KEYA KONNECT.
- 3. The Configuration list of the KEYA KONNECT will appear.

Mode	Single user / Multi user
Volume	Silence / Low / High
LED when close	Disabled / Enabled
Battery	Battery percentage

8.8 Remove MASTER

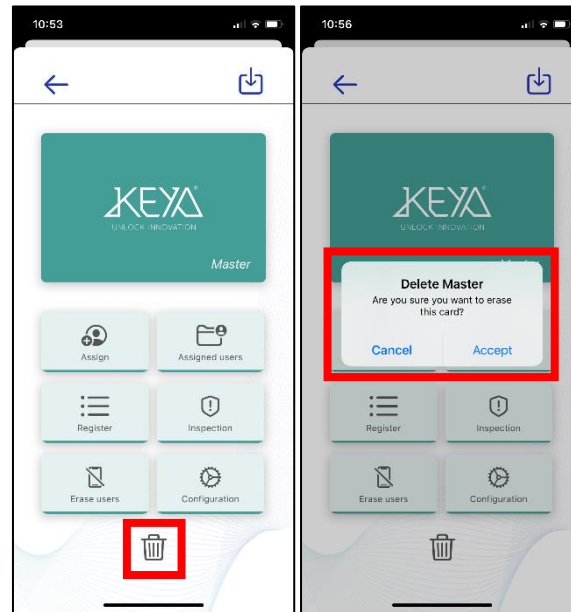

1. Press the Trash Button.
2. A warning pop-up will appear.
3. If you press accept, card will disappear from the App.

9. BATTERY CHANGE

Three flashes of the Yellow LED: The batteries need to be replaced. Report Low Battery after card interaction with the App A T20 Torx bit is required for the top housed screw..



IP (Front/Lock)	---/45
Operating temperature	-5°C < > +70°C
Cam	> 45 Kgf
Ultraviolet rays	> 10000 hrs
Vibration	10 – 200 Hz 2g
Life Cycles	> 200000 ciclos
Electrostatic discharge	8000 V
Batteries	x4 AA (LR6)
Battery lifes	35000 cycles or three years
Technology	NFC with Keya Konnect APP

In the case of use in metal lockers, contact Keya.



RoHS



